



Model: OH3260H

Basic size of
 mm

d:	280
D:	540
B:	192

The basic rated load is
 kN


trends C:	3900
static state Co:	5850
Fatigue load limit Pu:	425

Rated rotation speed is
 r/min

Refer to the speed:	750
limit speed:	1000
Mass bearing + tightening sleeve:	210

model

bearing:	*23260CCK/W3 3
tapered adapter-sleeve:	OH3260H

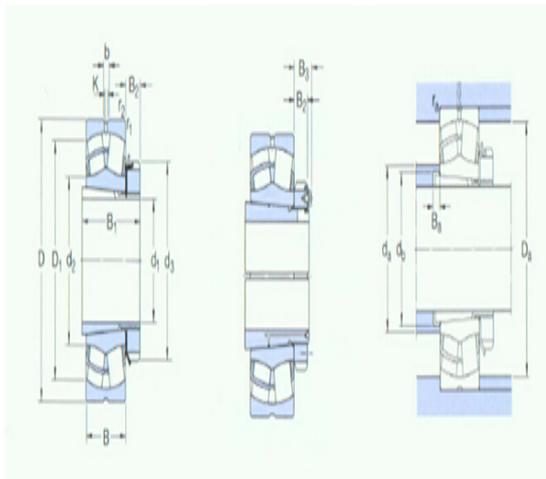

Dimensions are
 mm

d ₁ :	280
d ₂ ~ :	356
d ₃ :	380
D1 ~ :	461
B ₁ :	240
B ₂ :	40
B ₃ :	53
b:	22.3
k:	12
r _{1,2} the min:	5

Shoulder gear and chamfer size

mm

d_a the max:	356
d_b the min:	321
D_a the max:	520
B_a the min:	12
r_a the max:	4

Calculation coefficient

e:	0.35
Y1:	1.9
Y2:	2.9
Yo:	1.8