



Model: 232/500CAK/W33

Basic size of
mm

d ₁ :	470
D:	920
B:	336

The basic rated load is
kN

trends C:	10600
static state Co:	17300

Fatigue load limit	1060
Pu:	

Rated rotation speed is
r/min



Refer to the speed:	360
limit speed:	500
Mass bearing + tightening sleeve:	1100

model

bearing:	*232/500CAK/W33
	3
tapered adapter- sleeve:	OH32/500H

Dimensions are
mm

d ₁ :	470
d ₂ ~ :	631
d ₃ :	630
D1 ~ :	779
B ₁ :	428
B ₂ :	80
B ₃ :	100
b:	22.3
k:	12
r _{1,2} the min:	7.5

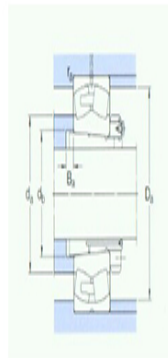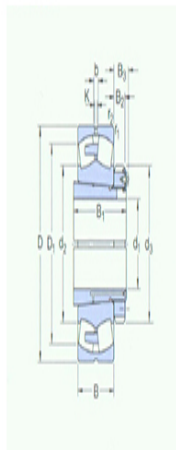

Shoulder gear and chamfer size

mm

d_a the max:	631
d_b the min:	534
D_a the max:	888
B_a the min:	18
r_a the max:	6

Calculation coefficient

e:	0.35
Y1:	1.9
Y2:	2.9
Y _o :	1.8