



Model: 230/560CAK/W33

Basic size of
mm

d ₁ :	530
D :	820
B :	195

The basic rated load is
kN

trends C :	5600
static state Co :	10200

Fatigue load

limit	680
Pu :	

Rated rotation speed is
r/min

Refer to the speed :	430
limit speed :	750

Mass bearing +

tightening sleeve :	445
---------------------	-----

model

bearing :	*230/560CAK/W3 3
-----------	---------------------



tapered adapter-sleeve :

OH30/560H

Dimensions are

mm

d ₁ :	530
d ₂ ~ :	644
d ₃ :	650
D1 ~ :	746
B ₁ :	282
B ₂ :	75
B ₃ :	97
b :	22.3
k :	12
r _{1,2} the min :	6

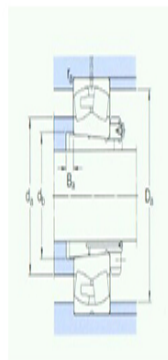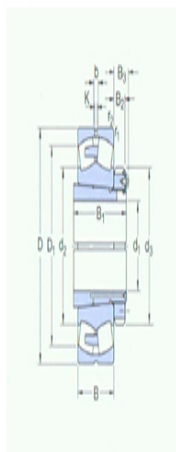

Shoulder gear and chamfer size

mm

d_a the max:	644
d_b the min:	582
D_a the max:	797
B_a the min:	20
r_a the max:	5

Calculation coefficient

e:	0.22
Y1:	3
Y2:	4.6
Y _o :	2.8