



Model: 239/630CAK/W33

Basic size of
mm

d ₁ :	600
D:	850
B:	165

The basic rated load is
kN

trends C:	4650
static state Co:	9800

Fatigue load

limit	640
Pu:	

Rated rotation speed is
r/min

Refer to the speed:	400
limit speed:	700



Mass bearing + tightening sleeve:	385
-----------------------------------	-----

model

bearing:	*239/630CAK/W33
	3
tapered adapter-sleeve:	OH39/630H

Dimensions are
mm

d ₁ :	600
d ₂ ~ :	705
d ₃ :	730
D1 ~ :	787
B ₁ :	254
B ₂ :	75
B ₃ :	97
b:	22.3
k:	12
r _{1,2} the min:	6

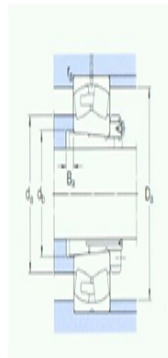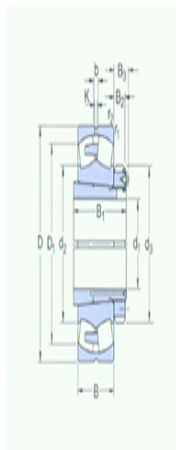

Shoulder gear and chamfer size

mm

d_a the max:	705
d_b the min:	650
D_a the max:	827
B_a the min:	22
r_a the max:	5

Calculation coefficient

e:	0.17
Y1:	4
Y2:	5.9
Y _o :	4