

Model: OH32/670H

Basic size of
mm

d ₁ :	630
D:	1220
B:	438

The basic rated load is
kN

trends C:	15400
static state Co:	30500
Fatigue load limit Pu:	1700

Rated rotation speed is
r/min

Refer to the speed:	220
limit speed:	360
Mass bearing + tightening sleeve:	2535


model

bearing:	232/670CAK/W3
	3
tapered adapter-sleeve:	OH32/670H

Dimensions are
mm

d ₁ :	630
d ₂ ~ :	830
d ₃ :	850
D1 ~ :	1028
B ₁ :	558
B ₂ :	106
B ₃ :	131
b:	22.3
k:	12
r _{1,2} the min:	12

Shoulder gear and chamfer size

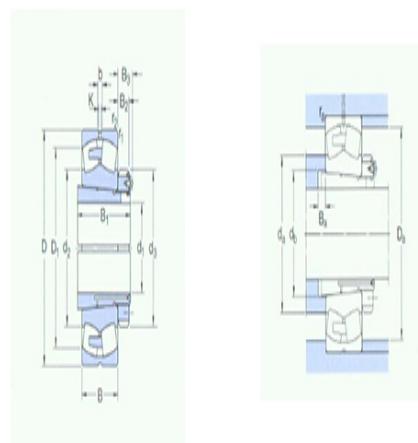

mm

d _a the max:	830
d _b the min:	711
D _a the max:	1172
B _a the min:	22
r _a the max:	10

Calculation coefficient

e:	0.35
Y ₁ :	1.9
Y ₂ :	2.9
Y ₀ :	1.8