



Model: 239/710CAK/W33

Basic size of
mm

d ₁ :	670
D :	950
B :	180

The basic rated load is
kN

trends C :	5600
static state Co :	12000

Fatigue load

limit	765
Pu :	

Rated rotation speed is
r/min

Refer to the speed :	340
limit speed :	600

Mass bearing +

tightening sleeve :	525
---------------------	-----

model



bearing :	*239/710CAK/W3 3
-----------	---------------------

tapered adapter-sleeve :

OH39/710H

Dimensions are
mm

d ₁ :	670
d ₂ ~ :	788
d ₃ :	830
D1 ~ :	882
B ₁ :	286
B ₂ :	90
B ₃ :	112
b :	22.3
k :	12
r _{1,2} the min :	6

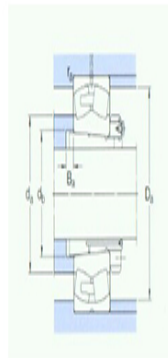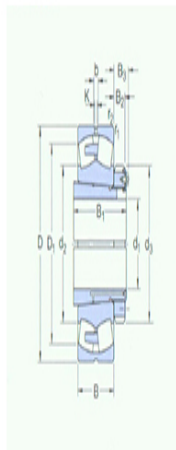

Shoulder gear and chamfer size

mm

d_a the max:	788
d_b the min:	732
D_a the max:	927
B_a the min:	26
r_a the max:	5

Calculation coefficient

e:	0.17
Y1:	4
Y2:	5.9
Y _o :	4