



Model: 239/750CAK/W33

Basic size of
 mm

| | |
|------------------|------|
| d ₁ : | 710 |
| D: | 1000 |
| B: | 185 |

The basic rated load is
 kN

| | |
|------------------|-------|
| trends C: | 6000 |
| static state Co: | 13200 |

Fatigue load

| | |
|-------|-----|
| limit | 815 |
| Pu: | |



Rated rotation speed is
 r/min

| | |
|---------------------|-----|
| Refer to the speed: | 320 |
| limit speed: | 560 |

| | |
|-----------------------------------|-----|
| Mass bearing + tightening sleeve: | 605 |
|-----------------------------------|-----|

model

| | |
|-------------------------|-----------------|
| bearing: | *239/750CAK/W33 |
| tapered adapter-sleeve: | OH39/750H |

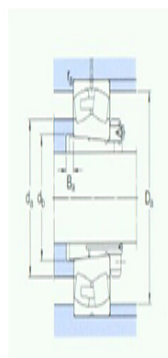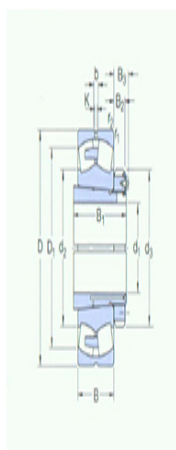

Dimensions are
 mm

| | |
|---------------------------|------|
| d ₁ : | 710 |
| d ₂ ~ : | 832 |
| d ₃ : | 870 |
| D1 ~ : | 930 |
| B ₁ : | 291 |
| B ₂ : | 90 |
| B ₃ : | 112 |
| b: | 22.3 |
| k: | 12 |
| r _{1,2} the min: | 6 |

Shoulder gear and chamfer size

mm

d_a the max: 832

d_b the min: 772

D_a the max: 977

B_a the min: 26

r_a the max: 5

Calculation coefficient

e: 0.16

Y1: 4.2

Y2: 6.3

Yo: 4