



Model: OH39/750H

Basic size of
mm

d ₁ :	710
D:	1000
B:	185

The basic rated load is
kN

trends C:	6000
static state Co:	13200

Fatigue load

limit	815
Pu:	

Rated rotation speed is
r/min

Refer to the speed:	320
limit speed:	560



Mass bearing + tightening sleeve:	605
-----------------------------------	-----

model

bearing:	*239/750CAK/W3 3
tapered adapter-sleeve:	OH39/750H

Dimensions are
mm

d ₁ :	710
d ₂ ~ :	832
d ₃ :	870
D1 ~ :	930
B ₁ :	291
B ₂ :	90
B ₃ :	112
b:	22.3
k:	12
r _{1,2} the min:	6

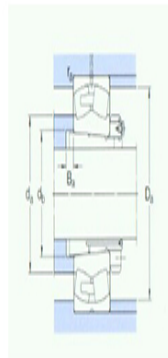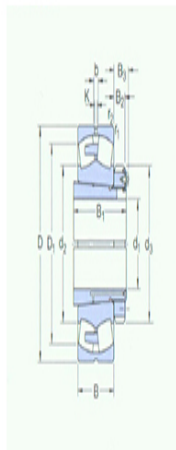

Shoulder gear and chamfer size

mm

d_a the max: 832

d_b the min: 772

D_a the max: 977

B_a the min: 26

r_a the max: 5

Calculation coefficient

e: 0.16

Y1: 4.2

Y2: 6.3

Yo: 4