


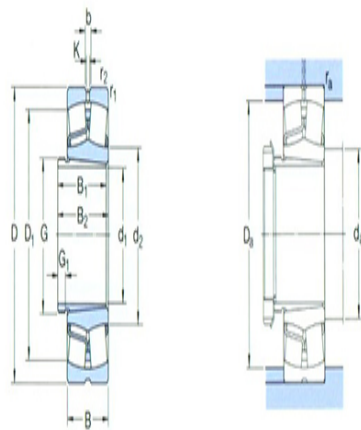

Model: 21308EK

Basic size of
mm

d ₁ :	35
D:	90
B:	23

The basic rated load is
kN

trends C:	104
static state Co:	108
Fatigue load limit Pu:	11.8

Rated rotation speed is
r/min

Refer to the speed:	7000
limit speed:	9500
Mass bearing + return sleeve:	0.84

model

bearing:	*21308E K
withdrawal sleeve:	AH308

Dimensions are
mm

d ₁ :	35
d ₂ ~:	59.9
D1 ~:	79.8
B ₁ :	29
B ₂ ¹⁾ :	32
G:	M45×1.5
G ₁ :	6
b:	5.5
k:	3
r _{1,2} the min:	1.5

Shoulder gear and chamfer size
mm

d _a the max:	49
-------------------------	----

Da the max:	81
r_a the max:	1.5

Calculation coefficient

e:	0.24
Y1:	2.8
Y2:	4.2
Yo:	2.8