



**Model: 232/500CAK/W33**

Basic size of  
mm

d <sub>1</sub> :	480
D:	920
B:	336

The basic rated load is  
kN

trends C:	10600
static state Co:	17300
Fatigue load limit	1060
Pu:	

Rated rotation speed is  
r/min

Refer to the speed:	360
limit speed:	500
Mass bearing + return sleeve:	1020


model

bearing:	*232/500CAK/W3 3
withdrawal sleeve:	AOHX32/500G

Dimensions are  
mm

d <sub>1</sub> :	480
d <sub>2</sub> ~ :	631
D1 ~ :	779
B <sub>1</sub> :	393
B <sub>2</sub> <sup>1)</sup> :	405
G:	Tr530×6
G <sub>1</sub> :	54
b:	22.3
k:	12
r <sub>1,2</sub> the min:	7.5

Shoulder gear and chamfer size

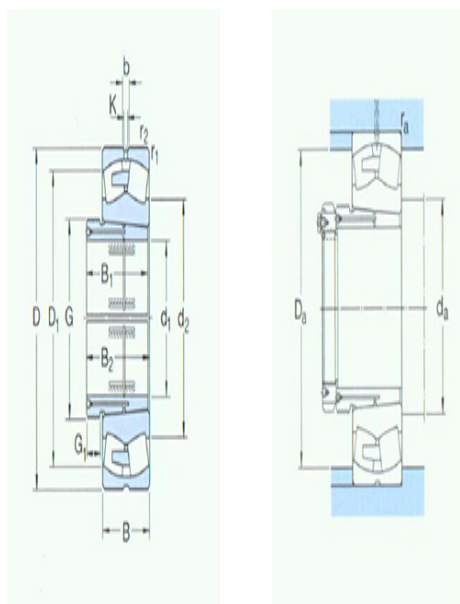

mm

$d_a$  the max: 532

$D_a$  the max: 888

$r_a$  the max: 6

Calculation coefficient

e: 0.35

Y1: 1.9

Y2: 2.9

Yo: 1.8