



**Model: AOHX32/560**

Basic size of  
mm

d <sub>1</sub> :	530
D :	1030
B :	365

The basic rated load is  
kN

trends C :	11500
static state Co :	22000
Fatigue load limit Pu :	1400

Rated rotation speed is  
r/min

Refer to the speed :	280
limit speed :	430
Mass bearing + return sleeve :	1500


model

bearing :	232/560CAK/W3 3
withdrawal sleeve :	AOHX32/560

Dimensions are  
mm

d <sub>1</sub> :	530
d <sub>2</sub> ~ :	704
D1 ~ :	878
B <sub>1</sub> :	422
B <sub>2</sub> <sup>1)</sup> :	434
G :	Tr600×6
G <sub>1</sub> :	57
b :	22.3
k :	12
r <sub>1,2</sub> the min :	9.5

Shoulder gear and chamfer size  
mm

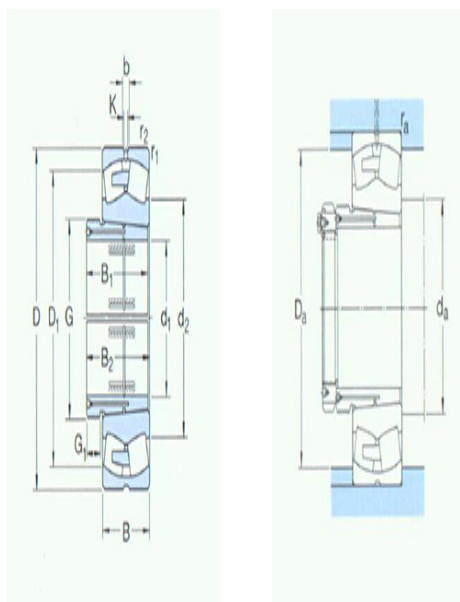

$d_a$ the max:	600
$D_a$ the max:	990
$r_a$ the max:	8

Calculation coefficient

e:	0.35
Y1:	1.9
Y2:	2.9
Yo:	1.8