



Model: C2215KV

Basic size of
mm

d:	75
D:	130
B:	31

The basic rated load is
kN

trends C:	220
static state Co:	240
Fatigue load limit	29
Pu:	

Rated rotation speed is
r/min

Refer to the speed:	-
limit speed:	2200
quality:	1.65

model



Bearing cylindrical hole:	*C2215V
conical bore:	*C2215K V

Dimensions are
mm

d:	75
$d_2 \sim :$	88.5
$D_1 \sim :$	115
$r_{1,2} \text{ the min:}$	1.5
$s_1^{1)} \sim :$	9.6
$s_2^{1)} \sim :$	5.3

Shoulder gear and chamfer size
mm

$d_a \text{ the min:}$	84
$d_a \text{ the max:}$	105
$D_a \text{ the min:}$	-
$D_a \text{ the max:}$	121
$C_a^{2)} \text{ the max:}$	-

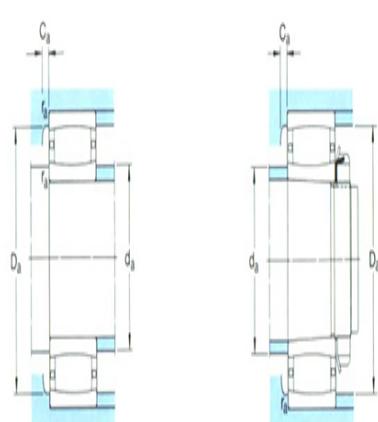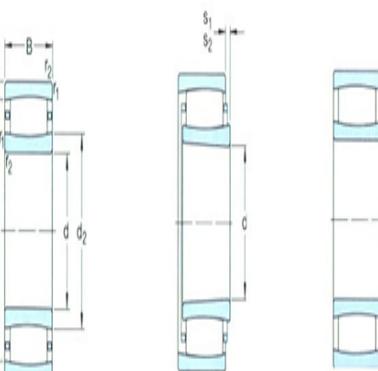

r_a the max:

1.5

Calculation coefficient

k_1 :

0.099

k_2 :

0.127