



Model: C4028V

Basic size of
mm

d:	140
D:	210
B:	69

The basic rated load is
kN

trends C:	750
static state Co:	1220
Fatigue load limit Pu:	118

Rated rotation speed is
r/min

Refer to the speed:	-
limit speed:	800
quality:	8.55

model



Bearing cylindrical hole:	*C4028V
conical bore:	*C4028K30 V

Dimensions are
mm

d:	140
$d_2 \sim :$	161
$D_1 \sim :$	193
$r_{1,2} \text{ the min:}$	2
$s_1^{1)} \sim :$	11.4
$s_2^{1)} \sim :$	5.9

Shoulder gear and chamfer size
mm

$d_a \text{ the min:}$	149
$d_a \text{ the max:}$	175
$D_a \text{ the min:}$	-
$D_a \text{ the max:}$	201
$C_a^{2)} \text{ the max:}$	-

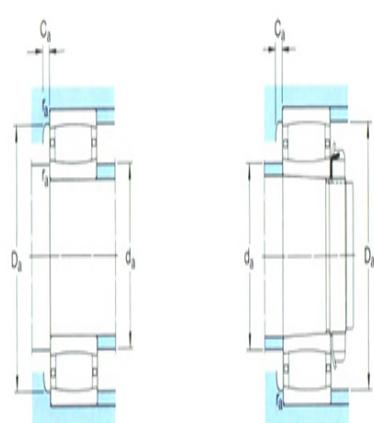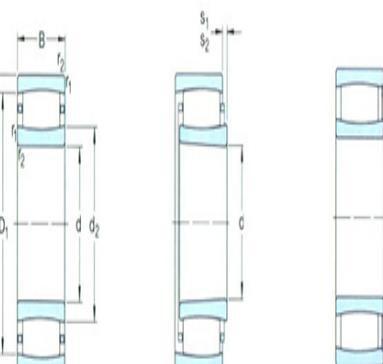

r_a the max: 2

Calculation coefficient

k₁: 0.115

k₂: 0.097