



Model: C4134K30V1

Basic size of
 mm

d:	170
D:	280
B:	109

The basic rated load is
 kN


trends C:	1530
static state Co:	2280
Fatigue load limit Pu:	208

Rated rotation speed is
 r/min

Refer to the speed:	-
limit speed:	280
quality:	27

model

Bearing cylindrical hole:	*C4134V1)
conical bore:	*C4134K30V1)

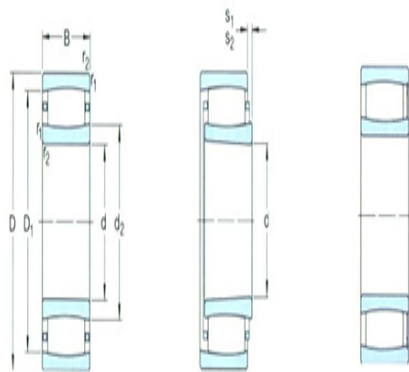


Dimensions are
 mm

d:	170
d ₂ ~ :	200
D1 ~ :	251
r _{1,2} the min:	2.1
s ₁ ¹⁾ ~ :	21
s ₂ ¹⁾ ~ :	11.1

Shoulder gear and chamfer size
 mm

d _a the min:	182
d _a the max:	200
Da the min:	-
Da the max:	268
Ca ²⁾ the max:	-

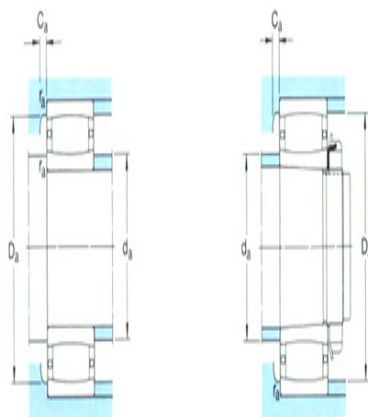

r_a the max:	2
----------------	---

Calculation coefficient

k_1 :	0.101
---------	-------

k_2 :	0.106
---------	-------