



Model: C3052

Basic size of
mm

d:	260
D:	400
B:	104

The basic rated load is
kN

trends C:	1760
static state Co:	2850
Fatigue load limit Pu:	232

Rated rotation speed is
r/min

Refer to the speed:	1300
limit speed:	1800
quality:	46

model



Bearing cylindrical hole:	*C3052
conical bore:	*C3052K2)

Dimensions are
mm

d:	260
d ₂ ~ :	305
D1 ~ :	367
r _{1,2} the min:	4
s ₁ ¹⁾ ~ :	19.3
s ₂ ¹⁾ ~ :	-

Shoulder gear and chamfer size
mm

d _a the min:	275
d _a the max:	325
Da the min:	350
Da the max:	385
Ca ²⁾ the max:	3.4

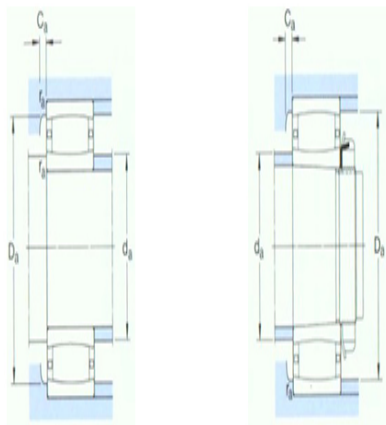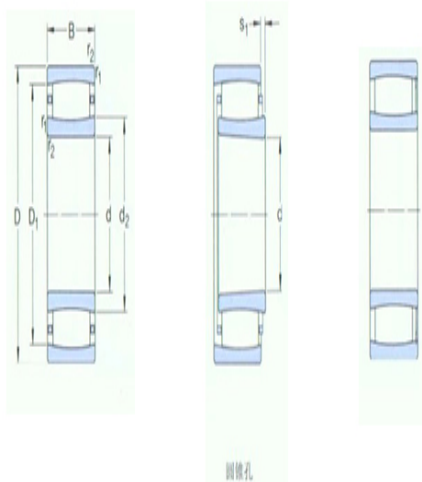

r_a the max:	3
----------------	---

Calculation coefficient

k_1 :	0.122
---------	-------

k_2 :	0.096
---------	-------