



Model: C3152

Basic size of
 mm

| | |
|----|-----|
| d: | 260 |
| D: | 440 |
| B: | 144 |

The basic rated load is
 kN

| | |
|---------------------------|------|
| trends C: | 2650 |
| static state Co: | 4050 |
| Fatigue load limit Pu: | 325 |

Rated rotation speed is
 r/min

| | |
|---------------------|------|
| Refer to the speed: | 1100 |
| limit speed: | 1500 |
| quality: | 87 |

model



| | |
|------------------------------|---------------|
| Bearing cylindrical hole: | *C3152 |
| conical bore: | *C3152K2) |

Dimensions are
 mm

| | |
|----------------------------------|------|
| d: | 260 |
| d ₂ ~ : | 314 |
| D1 ~ : | 394 |
| r _{1,2} the min: | 4 |
| s ₁ ¹⁾ ~ : | 26.4 |
| s ₂ ¹⁾ ~ : | - |

Shoulder gear and chamfer size
 mm

| | |
|---------------------------|-----|
| d _a the min: | 277 |
| d _a the max: | 340 |
| Da the min: | 375 |
| Da the max: | 423 |
| Ca ²⁾ the max: | 4.1 |

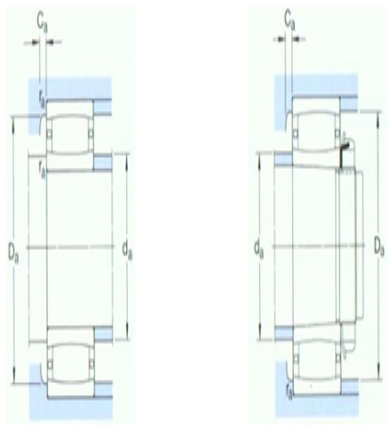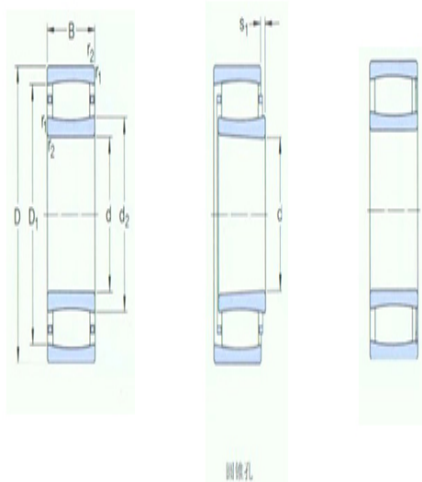

| | |
|----------------|---|
| r_a the max: | 3 |
|----------------|---|

Calculation coefficient

| | |
|---------|-------|
| k_1 : | 0.115 |
|---------|-------|

| | |
|---------|-------|
| k_2 : | 0.096 |
|---------|-------|