



Model: C3060M

Basic size of
mm

d:	300
D:	460
B:	118

The basic rated load is
kN

trends C:	2160
static state Co:	3750
Fatigue load limit Pu:	290

Rated rotation speed is
r/min

Refer to the speed:	1100
limit speed:	1500
quality:	71

model



Bearing cylindrical hole:	*C3060M
conical bore:	*C3060K M

Dimensions are
mm

d:	300
d ₂ ~ :	352
D1 ~ :	417
r _{1,2} the min:	4
s ₁ ¹⁾ ~ :	20
s ₂ ¹⁾ ~ :	-

Shoulder gear and chamfer size
mm

d _a the min:	315
d _a the max:	375
Da the min:	405
Da the max:	445
Ca ²⁾ the max:	1.7

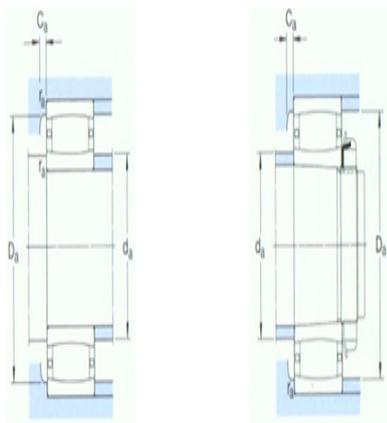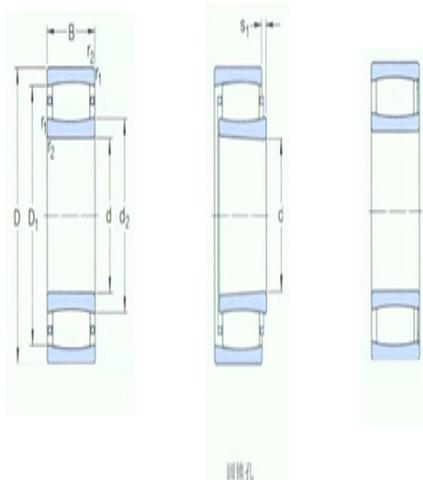

r_a the max:	3
----------------	---

Calculation coefficient

k_1 :	0.123
---------	-------

k_2 :	0.095
---------	-------