



Model: C4060M

Basic size of
mm

d:	300
D:	460
B:	160

The basic rated load is
kN

trends C:	2900
static state Co:	4900
Fatigue load limit Pu:	380

Rated rotation speed is
r/min

Refer to the speed:	850
limit speed:	1200
quality:	95

model



Bearing cylindrical hole:	*C4060M
conical bore:	*C4060K30 M

Dimensions are
mm

d:	300
d ₂ ~ :	338
D1 ~ :	409
r _{1,2} the min:	4
s ₁ ¹⁾ ~ :	30.4
s ₂ ¹⁾ ~ :	-

Shoulder gear and chamfer size
mm

d _a the min:	315
d _a the max:	360
Da the min:	400
Da the max:	445
Ca ²⁾ the max:	2.8

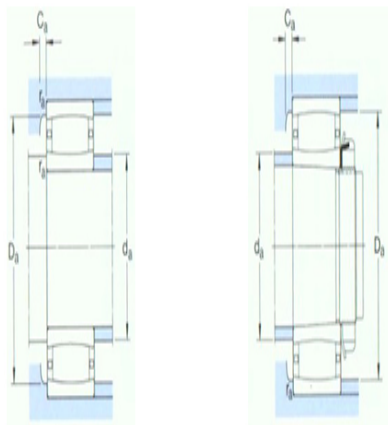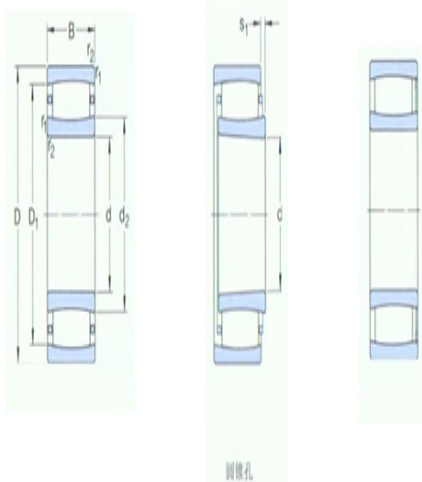

r_a the max:	3
----------------	---

Calculation coefficient

k_1 :	0.105
---------	-------

k_2 :	0.106
---------	-------