



### Model: C3064M

Basic size of  
mm

d:	320
D:	480
B:	121

The basic rated load is  
kN

trends C:	2280
static state Co:	4000
Fatigue load limit Pu:	310

Rated rotation speed is  
r/min

Refer to the speed:	1000
limit speed:	1400
quality:	76.5

model



Bearing cylindrical hole:	*C3064M
conical bore:	*C3064K M

Dimensions are  
mm

d:	320
d <sub>2</sub> ~ :	376
D1 ~ :	440
r <sub>1,2</sub> the min:	4
s <sub>1</sub> <sup>1)</sup> ~ :	23.3
s <sub>2</sub> <sup>1)</sup> ~ :	-

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	335
d <sub>a</sub> the max:	395
Da the min:	430
Da the max:	465
Ca <sup>2)</sup> the max:	1.8

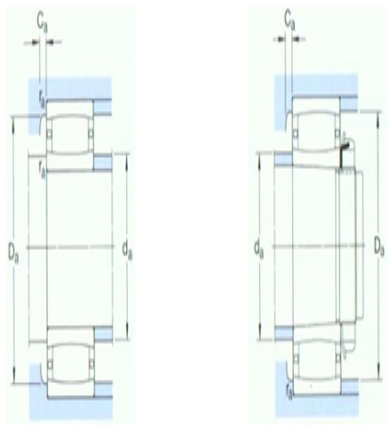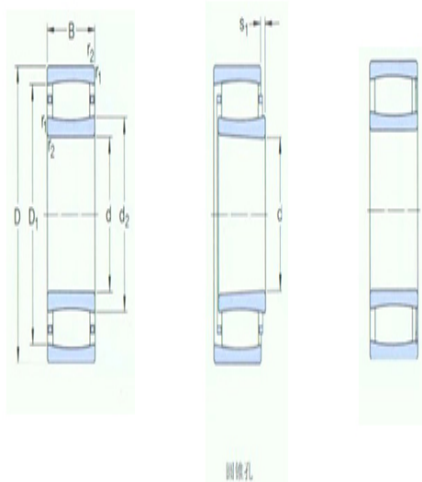

$r_a$ the max:	3
----------------	---

Calculation coefficient

$k_1$ :	0.121
---------	-------

$k_2$ :	0.098
---------	-------