



Model: C3076M

Basic size of
 mm

d:	380
D:	560
B:	135

The basic rated load is
 kN

trends C:	3000
static state Co:	5200
Fatigue load limit Pu:	390

Rated rotation speed is
 r/min

Refer to the speed:	900
limit speed:	1200
quality:	110

model



Bearing cylindrical hole:	*C3076M
conical bore:	*C3076K M

Dimensions are
 mm

d:	380
d ₂ ~ :	431
D1 ~ :	511
r _{1,2} the min:	5
s ₁ ¹⁾ ~ :	27
s ₂ ¹⁾ ~ :	-

Shoulder gear and chamfer size
 mm

d _a the min:	398
d _a the max:	460
Da the min:	495
Da the max:	542
Ca ²⁾ the max:	2

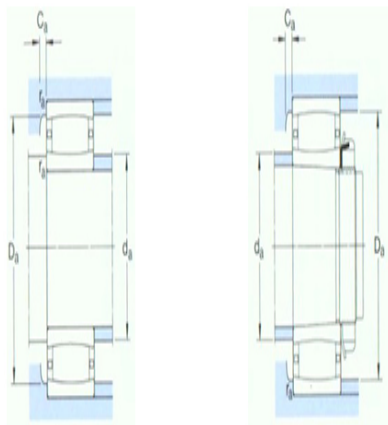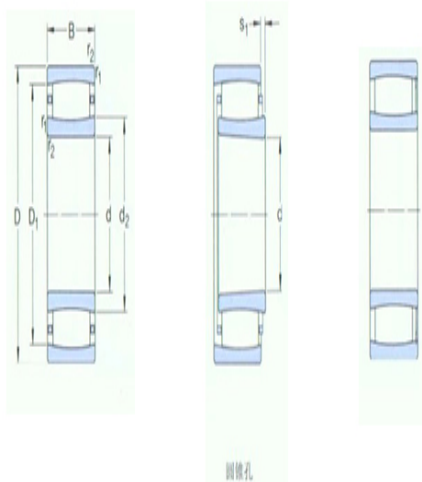

r_a the max:	4
----------------	---

Calculation coefficient

k_1 :	0.12
---------	------

k_2 :	0.1
---------	-----