



Model: C3140K2

Basic size of
 mm

d:	200
D:	340
B:	112

The basic rated load is
 kN

trends C:	1600
static state Co:	2320
Fatigue load limit Pu:	204

Rated rotation speed is
 r/min

Refer to the speed:	1500
limit speed:	2000
quality:	40

model


Bearing cylindrical hole:	*C3140
conical bore:	*C3140K2)

Dimensions are
 mm

d:	200
d ₂ ~ :	245
D1 ~ :	305
r _{1,2} the min:	3
s ₁ ¹⁾ ~ :	27.3
s ₂ ¹⁾ ~ :	-

Shoulder gear and chamfer size
 mm

d _a the min:	214
d _a the max:	260
Da the min:	307
Da the max:	326
Ca ²⁾ the max:	-

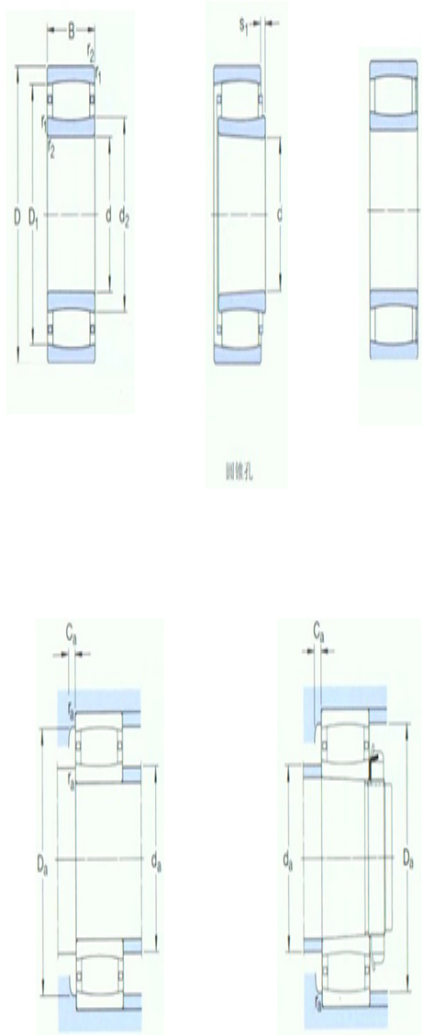

r_a the max:	2.5
----------------	-----

Calculation coefficient

k_1 :	0.108
---------	-------

k_2 :	0.104
---------	-------