



Model: C3064KM

Basic size of
mm

d:	320
D:	480
B:	121

The basic rated load is
kN

trends C:	2280
static state Co:	4000
Fatigue load limit	310
Pu:	

Rated rotation speed is
r/min

Refer to the speed:	1000
limit speed:	1400
quality:	76.5

model



Bearing cylindrical hole:	*C3064M
conical bore:	*C3064K M

Dimensions are
mm

d:	320
$d_2 \sim :$	376
$D_1 \sim :$	440
$r_{1,2}$ the min:	4
$s_1^{1)} \sim :$	23.3
$s_2^{1)} \sim :$	-

Shoulder gear and chamfer size
mm

d_a the min:	335
d_a the max:	395
D_a the min:	430
D_a the max:	465
$C_a^2)$ the max:	1.8

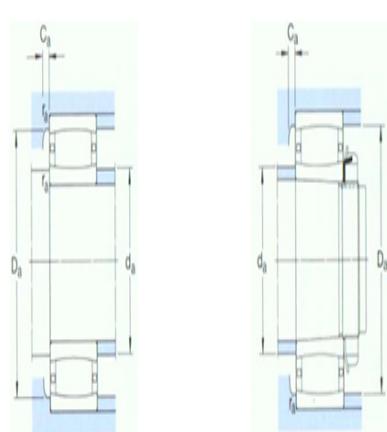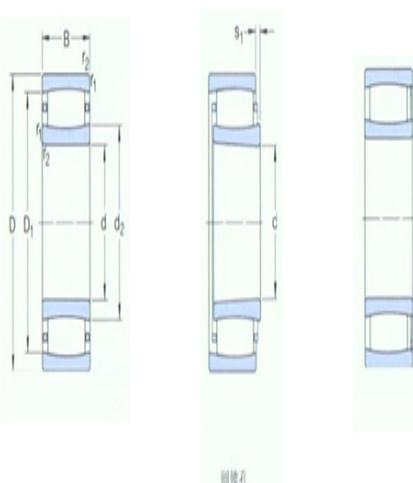

r_a the max: 3

Calculation coefficient

k₁: 0.121

k₂: 0.098