



Model: C3072KM2

Basic size of
mm

d:	360
D:	540
B:	134

The basic rated load is
kN

trends C:	2900
static state Co:	5000
Fatigue load limit Pu:	375

Rated rotation speed is
r/min

Refer to the speed:	900
limit speed:	1200
quality:	105

model



Bearing cylindrical hole:	*C3072M
conical bore:	*C3072KM2)

Dimensions are
mm

d:	360
d ₂ ~ :	417
D1 ~ :	497
r _{1,2} the min:	5
s ₁ ¹⁾ ~ :	26.4
s ₂ ¹⁾ ~ :	-

Shoulder gear and chamfer size
mm

d _a the min:	378
d _a the max:	445
Da the min:	480
Da the max:	522
Ca ²⁾ the max:	2

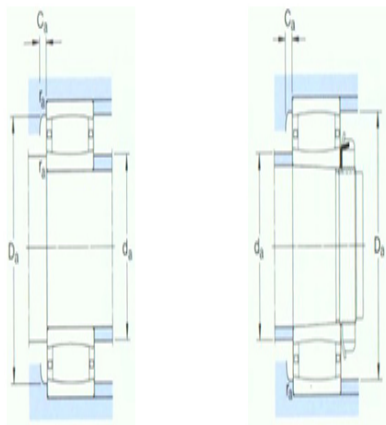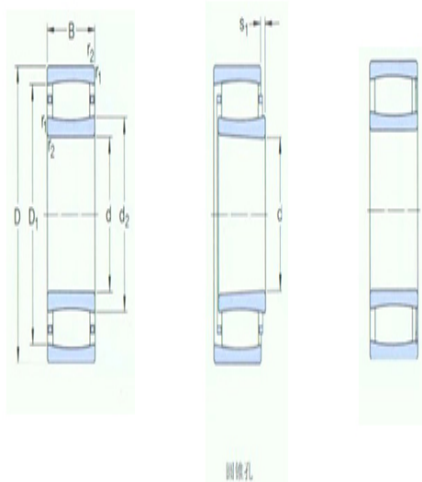

r_a the max:	4
----------------	---

Calculation coefficient

k_1 :	0.12
---------	------

k_2 :	0.099
---------	-------