



Model: C3076KM

Basic size of
mm

d:	380
D:	560
B:	135

The basic rated load is
kN

trends C:	3000
static state Co:	5200
Fatigue load limit Pu:	390

Rated rotation speed is
r/min

Refer to the speed:	900
limit speed:	1200
quality:	110

model



Bearing cylindrical hole:	*C3076M
conical bore:	*C3076K M

Dimensions are
mm

d:	380
$d_2 \sim :$	431
$D_1 \sim :$	511
$r_{1,2} \text{ the min:}$	5
$s_1^{1)} \sim :$	27
$s_2^{1)} \sim :$	-

Shoulder gear and chamfer size
mm

$d_a \text{ the min:}$	398
$d_a \text{ the max:}$	460
$D_a \text{ the min:}$	495
$D_a \text{ the max:}$	542
$C_a^{2)} \text{ the max:}$	2

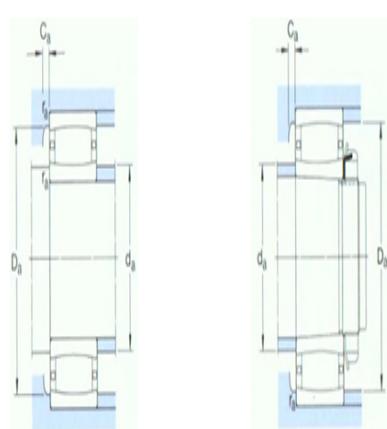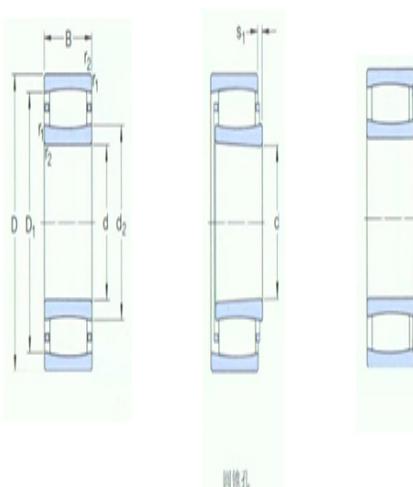

r_a the max:

4

Calculation coefficient

k₁:

0.12

k₂:

0.1