



Model: C3192M

Basic size of
mm

d:	460
D:	760
B:	240

The basic rated load is
kN

trends C:	6800
static state Co:	12000
Fatigue load limit Pu:	800

Rated rotation speed is
r/min

Refer to the speed:	600
limit speed:	800
quality:	430

model

Bearing cylindrical hole:	*C3192M
conical bore:	*C3192K M



Dimensions are
mm

d:	460
d ₂ ~ :	559
D1 ~ :	679
r _{1,2} the min:	7.5
s ₁ ¹⁾ ~ :	51

Shoulder gear and chamfer size
mm

d _a the min:	492
d _a the max:	570
Da the min:	655
Da the max:	728
Ca ²⁾ the max:	4.2
r _a the max:	6

Calculation coefficient

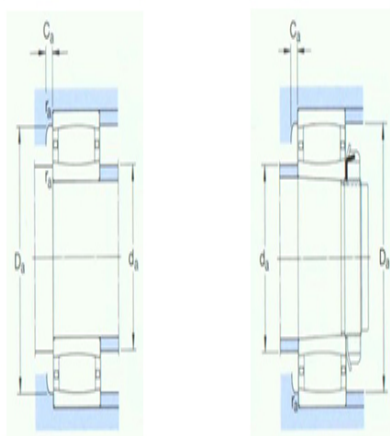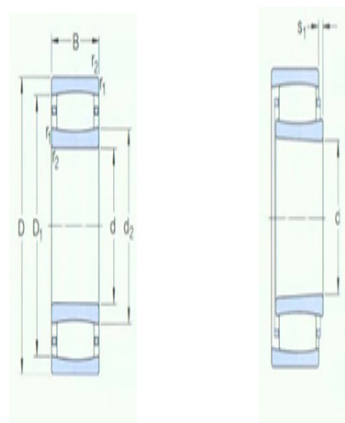

$k_1:$ 0.108

$k_2:$ 0.105