



Model: C4192M

Basic size of
mm

d:	460
D:	760
B:	300

The basic rated load is
kN

trends C:	8300
static state Co:	14300
Fatigue load limit Pu:	950

Rated rotation speed is
r/min

Refer to the speed:	480
limit speed:	630
quality:	535

model

Bearing cylindrical hole:	*C4192M
conical bore:	*C4192K30 M



Dimensions are
mm

d:	460
d ₂ ~ :	540
D1 ~ :	670
r _{1,2} the min:	7.5
s ₁ ¹⁾ ~ :	46.2

Shoulder gear and chamfer size
mm

d _a the min:	492
d _a the max:	570
Da the min:	655
Da the max:	728
Ca ²⁾ the max:	5.6
r _a the max:	6

Calculation coefficient

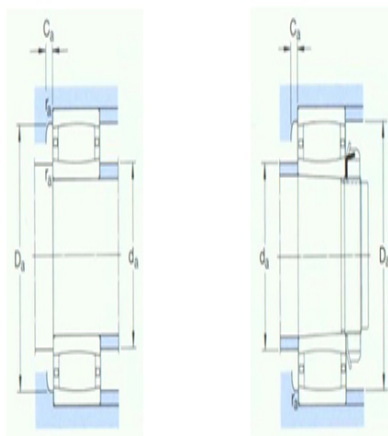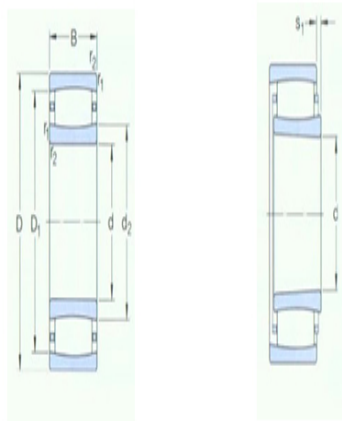

$k_1:$ 0.111

$k_2:$ 0.097