



## Model: C39/560M

Basic size of  
mm

d:	560
D:	750
B:	140

The basic rated load is  
kN

trends C:	3600
static state Co:	7350
Fatigue load limit Pu:	490

Rated rotation speed is  
r/min

Refer to the speed:	600
limit speed:	850
quality:	170

model

Bearing cylindrical hole:	*C39/560M
conical bore:	*C39/560K M



Dimensions are  
mm

d:	560
d <sub>2</sub> ~ :	622
D1 ~ :	701
r <sub>1,2</sub> the min:	5
s <sub>1</sub> <sup>1)</sup> ~ :	32.4

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	578
d <sub>a</sub> the max:	645
Da the min:	685
Da the max:	732
Ca <sup>2)</sup> the max:	2.3
r <sub>a</sub> the max:	4

Calculation coefficient

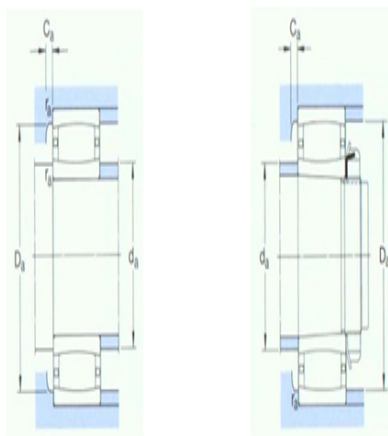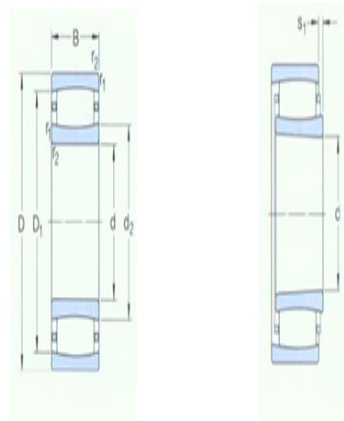

$k_1:$  0.128

$k_2:$  0.104