



## Model: C39/600M

Basic size of  
mm

d:	600
D:	800
B:	150

The basic rated load is  
kN

trends C:	4000
static state Co:	8800
Fatigue load limit Pu:	570

Rated rotation speed is  
r/min

Refer to the speed:	560
limit speed:	750
quality:	210

model

Bearing cylindrical hole:	*C39/600M
conical bore:	*C39/600K M



Dimensions are  
mm

d:	600
d <sub>2</sub> ~ :	666
D1 ~ :	744
r <sub>1,2</sub> the min:	5
s <sub>1</sub> <sup>1)</sup> ~ :	32.4

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	618
d <sub>a</sub> the max:	685
Da the min:	725
Da the max:	782
Ca <sup>2)</sup> the max:	2.4
r <sub>a</sub> the max:	4

Calculation coefficient

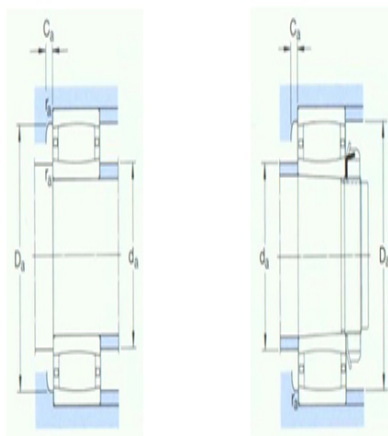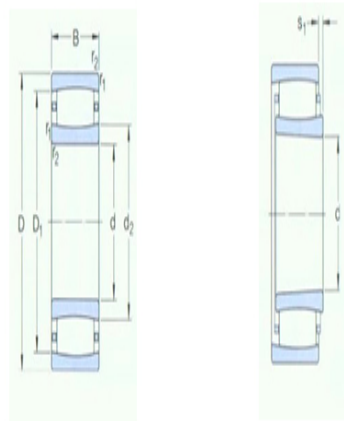

$k_1:$  0.131

$k_2:$  0.1