



Model: C3088KMB

Basic size of
mm

d:	440
D:	650
B:	157

The basic rated load is
kN

trends C:	3750
static state Co:	6400
Fatigue load limit Pu:	465

Rated rotation speed is
r/min

Refer to the speed:	750
limit speed:	1000
quality:	185

model

Bearing cylindrical hole:	*C3088MB
conical bore:	*C3088KM B



Dimensions are
mm

d:	440
d ₂ ~ :	491
D1 ~ :	587
r _{1,2} the min:	6
s ₁ ¹⁾ ~ :	19.7

Shoulder gear and chamfer size
mm

d _a the min:	463
d _a the max:	490
Da the min:	565
Da the max:	627
Ca ²⁾ the max:	1.7
r _a the max:	5

Calculation coefficient

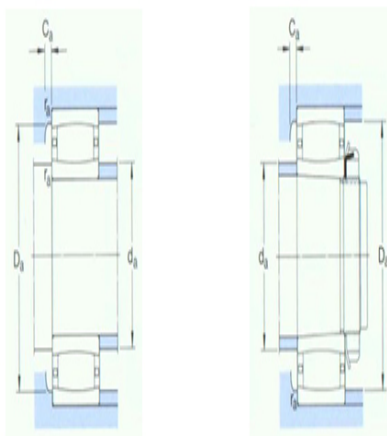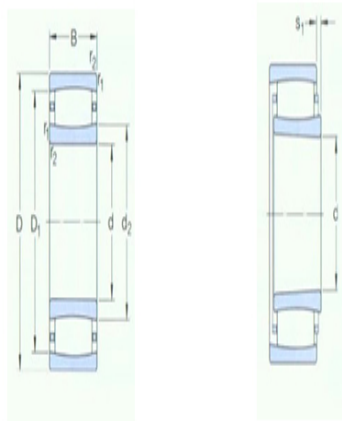

k_1 :	-
k_2 :	0.105