



## Model: C4192K30M

Basic size of  
mm

d:	460
D:	760
B:	300

The basic rated load is  
kN

trends C:	8300
static state Co:	14300
Fatigue load limit Pu:	950

Rated rotation speed is  
r/min

Refer to the speed:	480
limit speed:	630
quality:	535

model

Bearing cylindrical hole:	*C4192M
conical bore:	*C4192K30M



Dimensions are  
mm

d:	460
d <sub>2</sub> ~ :	540
D1 ~ :	670
r <sub>1,2</sub> the min:	7.5
s <sub>1</sub> <sup>1)</sup> ~ :	46.2

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	492
d <sub>a</sub> the max:	570
Da the min:	655
Da the max:	728
Ca <sup>2)</sup> the max:	5.6
r <sub>a</sub> the max:	6

Calculation coefficient

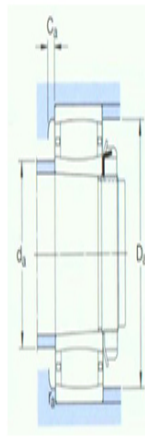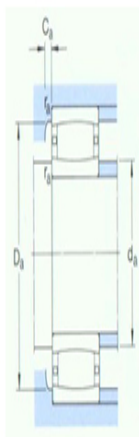

$k_1:$  0.111

$k_2:$  0.097