



Model: C39/560KM

Basic size of
mm

d:	560
D:	750
B:	140

The basic rated load is
kN

trends C:	3600
static state Co:	7350
Fatigue load limit Pu:	490

Rated rotation speed is
r/min

Refer to the speed:	600
limit speed:	850
quality:	170

model

Bearing cylindrical hole:	*C39/560M
conical bore:	*C39/560K M



Dimensions are
mm

d:	560
d ₂ ~ :	622
D1 ~ :	701
r _{1,2} the min:	5
s ₁ ¹⁾ ~ :	32.4

Shoulder gear and chamfer size
mm

d _a the min:	578
d _a the max:	645
Da the min:	685
Da the max:	732
Ca ²⁾ the max:	2.3
r _a the max:	4

Calculation coefficient

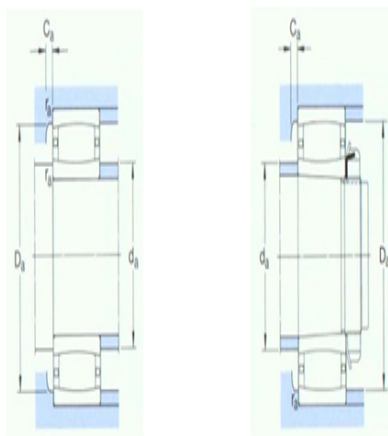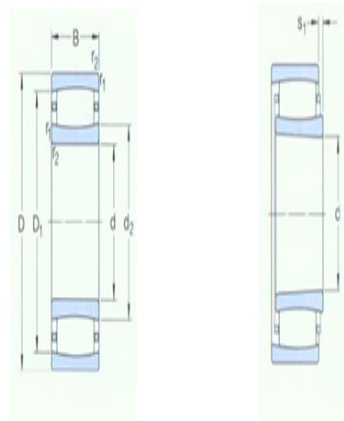

$k_1:$ 0.128

$k_2:$ 0.104