



## Model: C39/1060MB1

Basic size of  
mm

d:	1060
D:	1400
B:	250

The basic rated load is  
kN

trends C:	12500
static state Co:	29000
Fatigue load limit Pu:	1600

Rated rotation speed is  
r/min

Refer to the speed:	260
limit speed:	340
quality:	1040

model



Bearing cylindrical hole:	*C39/1060MB1)
conical bore:	*C39/1060KMB 1)

Dimensions are  
mm

d:	1060
d <sub>2</sub> ~ :	1175
D1 ~ :	1323
r <sub>1,2</sub> the min:	7.5
s <sub>1</sub> <sup>1)</sup> ~ :	25

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	1088
d <sub>a</sub> the max:	1170
Da the min:	1325
Da the max:	1372
Ca <sup>2)</sup> the max:	23.4
r <sub>a</sub> the max:	6

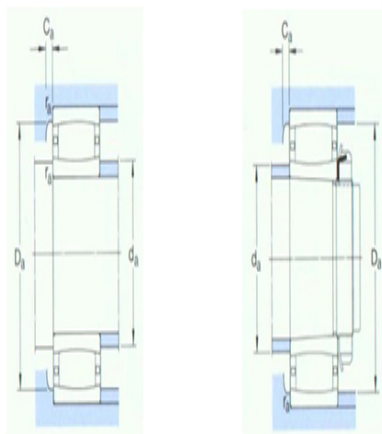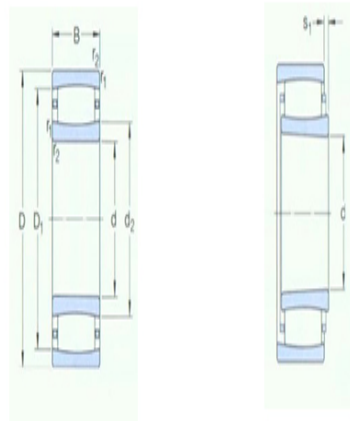

### Calculation coefficient

$k_1$ :	-
$k_2$ :	0.142