



Model: C30/750KMB1

Basic size of
 mm

d:	750
D:	1090
B:	250

The basic rated load is
 kN

trends C:	9000
static state Co:	18000
Fatigue load limit Pu:	1100

Rated rotation speed is
 r/min

Refer to the speed:	380
limit speed:	530
quality:	770

model



Bearing cylindrical hole:	*C30/750MB1)
conical bore:	*C30/750KMB1)

Dimensions are
 mm

d:	750
d ₂ ~ :	858
D1 ~ :	993
r _{1,2} the min:	7.5
s ₁ ¹⁾ ~ :	25

Shoulder gear and chamfer size
 mm

d _a the min:	778
d _a the max:	855
Da the min:	995
Da the max:	1062
Ca ²⁾ the max:	21.8
r _a the max:	6

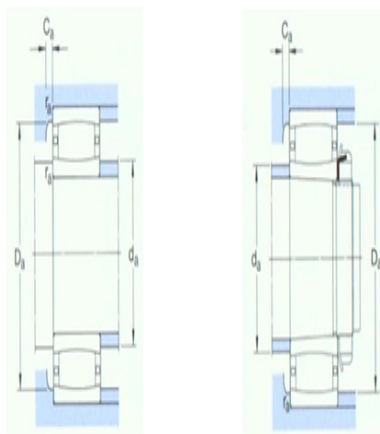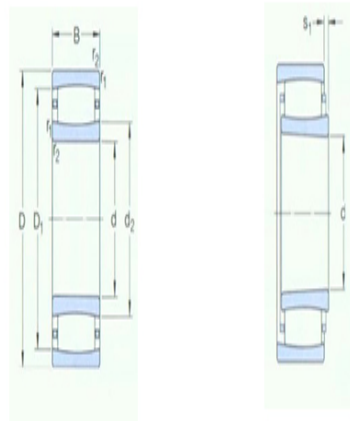

Calculation coefficient

k_1 : -

k_2 : 0.112