



Model: C39/900KMB1

Basic size of
mm

d:	900
D:	1180
B:	206

The basic rated load is
kN

trends C:	8150
static state Co:	18000
Fatigue load limit Pu:	1060

Rated rotation speed is
r/min

Refer to the speed:	340
limit speed:	450
quality:	580

model




Bearing cylindrical hole:	*C39/900MB1)
conical bore:	*C39/900KMB1)

Dimensions are
mm

d:	900
d ₂ ~ :	989
D1 ~ :	1113
r _{1,2} the min:	6
s ₁ ¹⁾ ~ :	20

Shoulder gear and chamfer size
mm

d _a the min:	923
d _a the max:	985
Da the min:	1115
Da the max:	1157
Ca ²⁾ the max:	18.4
r _a the max:	5

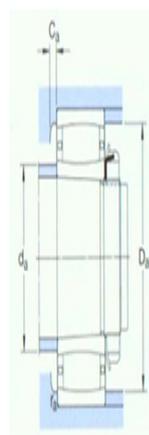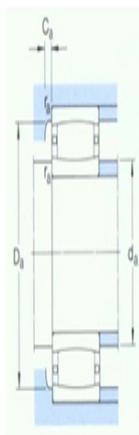

Calculation coefficient

k_1 : -

k_2 : 0.132