



Model: C39/950KM

Basic size of
mm

d:	950
D:	1250
B:	224

The basic rated load is
kN

trends C:	9300
static state Co:	22000
Fatigue load limit Pu:	1250

Rated rotation speed is
r/min

Refer to the speed:	300
limit speed:	430
quality:	745

model

Bearing cylindrical hole:	*C39/950M
conical bore:	*C39/950K M



Dimensions are
mm

d:	950
d ₂ ~ :	1044
D1 ~ :	1167
r _{1,2} the min:	7.5
s ₁ ¹⁾ ~ :	35

Shoulder gear and chamfer size
mm

d _a the min:	978
d _a the max:	1080
Da the min:	1145
Da the max:	1222
Ca ²⁾ the max:	3.1
r _a the max:	6

Calculation coefficient

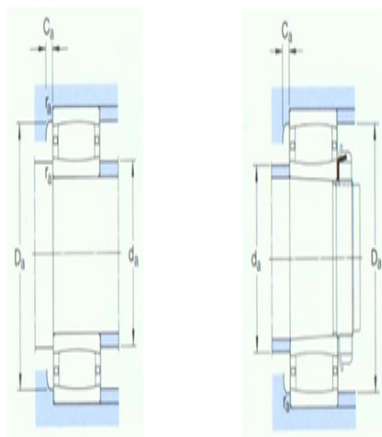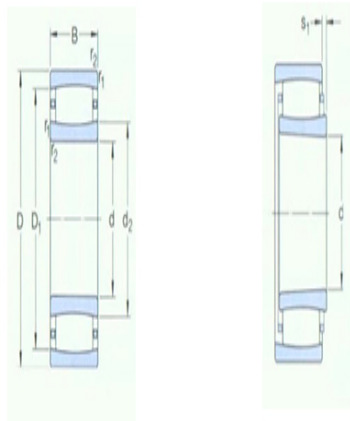

$k_1:$ 0.134

$k_2:$ 0.098