



Model: C39/1060KMB1

Basic size of
mm

d:	1060
D:	1400
B:	250

The basic rated load is
kN

trends C:	12500
static state Co:	29000
Fatigue load limit Pu:	1600

Rated rotation speed is
r/min

Refer to the speed:	260
limit speed:	340
quality:	1040

model



Bearing cylindrical hole:	*C39/1060MB1)
conical bore:	*C39/1060KMB 1)

Dimensions are
mm

d:	1060
d ₂ ~ :	1175
D1 ~ :	1323
r _{1,2} the min:	7.5
s ₁ ¹⁾ ~ :	25

Shoulder gear and chamfer size
mm

d _a the min:	1088
d _a the max:	1170
Da the min:	1325
Da the max:	1372
Ca ²⁾ the max:	23.4
r _a the max:	6

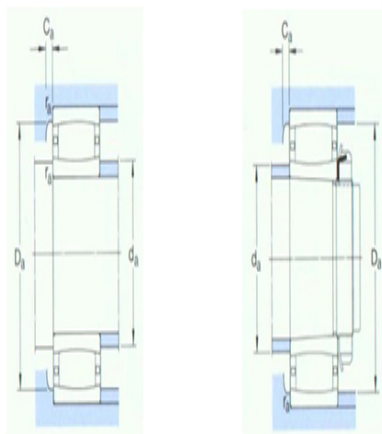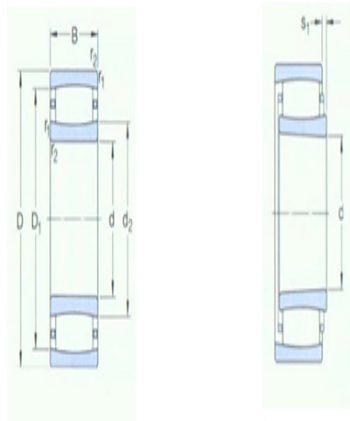

Calculation coefficient

k_1 :	-
k_2 :	0.142