

## Model: C4022-2CS5V1

Basic size of  
mm

d:	110
D:	170
B:	60

The basic rated load is  
kN


trends C:	415
static state Co:	585

Fatigue load limit  
Pu:

limit speed: 85

quality: 4.6

model: \*C4022-2CS5V1

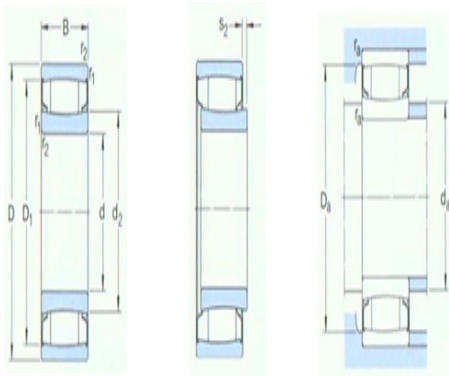

Dimensions are  
mm

d:	110
d <sub>2</sub> ~ :	128
D1 ~ :	155
r <sub>1,2</sub> the min:	2
s <sub>1</sub> <sup>1)</sup> ~ :	7.9

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	119
d <sub>a</sub> the max:	127
Da the max:	161
r <sub>a</sub> the max:	2

Calculation coefficient

k <sub>1</sub> :	0.142
k <sub>2</sub> :	0.083