


**Model: C4122-2CS5V**

Basic size of  
 mm

d:	110
D:	180
B:	69

The basic rated load is  
 kN

trends C:	500
static state Co:	710
Fatigue load limit Pu:	75
limit speed:	85
quality:	6.6
model:	*C4122- 2CS5V

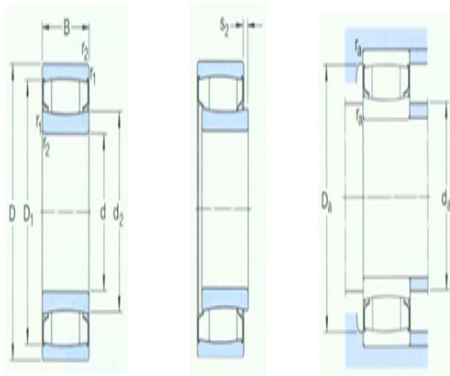

Dimensions are  
 mm

d:	110
d <sub>2</sub> ~ :	130
D1 ~ :	160
r <sub>1,2</sub> the min:	2
s <sub>1</sub> <sup>1)</sup> ~ :	8.2

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	121
d <sub>a</sub> the max:	129
Da the max:	169
r <sub>a</sub> the max:	2

Calculation coefficient

k <sub>1</sub> :	0.086
k <sub>2</sub> :	0.133