



Model: C2206KTN9

Basic size of
mm

d ₁ :	25
D:	62
B:	20

The basic rated load is
kN

trends C:	69.5
static state Co:	62
Fatigue load limit	7.2
Pu:	


Rated rotation speed is
r/min

Refer to the speed:	11000
limit speed:	15000
Mass bearing + tightening sleeve:	0.37


model

bearing:	*C2206KTN 9
tapered adapter- sleeve:	H306E

Dimensions are
mm

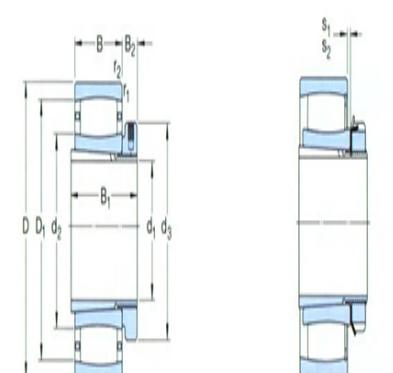

d ₁ :	25
d ₂ ~ :	37.4
d ₃ :	45
D1 ~ :	53.1
B ₁ :	31
B ₂ :	10.5
r _{1,2} the min:	1
s ₁ ¹⁾ ~ :	4.5
s ₂ ¹⁾ ~ :	-

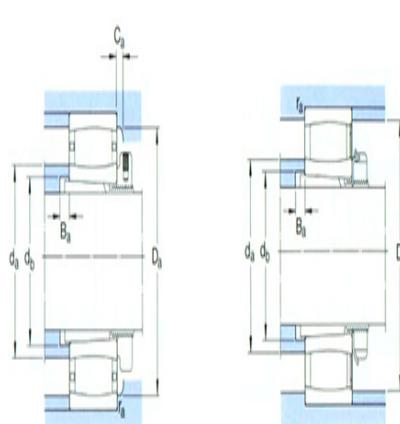

Shoulder gear and chamfer size
mm

d _a the max:	37
-------------------------	----

d _b the min:	33
D _a the min:	51
D _a the max:	56.4
B _a the min:	5
C _a ²⁾ the min:	0.3
r _a the max:	1

Calculation coefficient

k ₁ :	0.101
k ₂ :	0.111