



Model: C2206KV

Basic size of
 mm

d ₁ :	25
D :	62
B :	20

The basic rated load is
 kN

trends C :	76.5
static state Co :	71
Fatigue load limit Pu :	8.3

Rated rotation speed is
 r/min

Refer to the speed :	-
limit speed :	6000
Mass bearing + tightening sleeve :	0.39

model


bearing :	*C2206K V
tapered adapter-sleeve :	H306E

Dimensions are
 mm

d ₁ :	25
d ₂ ~ :	37.4
d ₃ :	45
D1 ~ :	53.1
B ₁ :	31
B ₂ :	10.5
r _{1,2} the min :	1
s ₁ ¹⁾ ~ :	4.5
s ₂ ¹⁾ ~ :	1.5

Shoulder gear and chamfer size
 mm

d _a the max :	49
d _b the min :	33

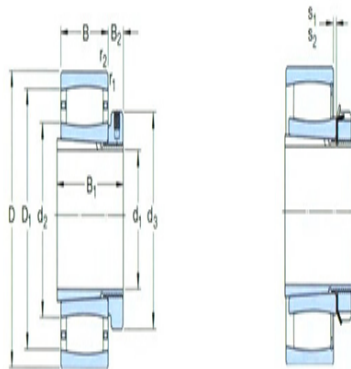

Da the min:	-
Da the max:	56.4
B _a the min:	5
Ca ²) the min:	-
r _a the max:	1

Calculation coefficient

k ₁ :	0.101
k ₂ :	0.111