



Model: C2208KV

Basic size of
mm

d ₁ :	35
D :	80
B :	23

The basic rated load is
kN

trends C :	102
static state Co :	104
Fatigue load limit Pu :	12

Rated rotation speed is
r/min

Refer to the speed :	-
limit speed :	4500
Mass bearing + tightening sleeve :	0.7

model



bearing :	*C2208K V
tapered adapter-sleeve :	H308

Dimensions are
mm

d ₁ :	35
d ₂ ~ :	52.4
d ₃ :	58
D1 ~ :	69.9
B ₁ :	36
B ₂ :	10
r _{1,2} the min :	1.1
s ₁ ¹⁾ ~ :	7.1
s ₂ ¹⁾ ~ :	4.1

Shoulder gear and chamfer size
mm

d _a the max :	66
d _b the min :	44

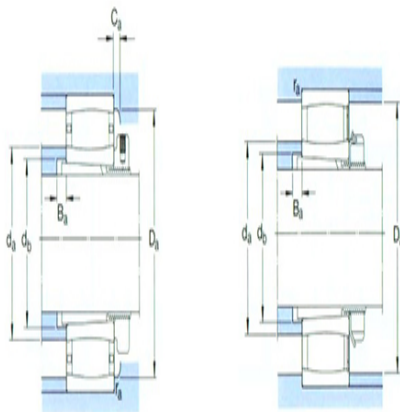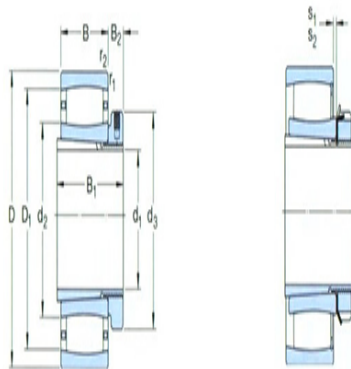

Da the min:	-
Da the max:	73
B _a the min:	5
Ca ²) the min:	-
r _a the max:	1

Calculation coefficient

k ₁ :	0.093
k ₂ :	0.128