



Model: C2213KV

Basic size of
mm

d ₁ :	60
D:	120
B:	31

The basic rated load is
kN

trends C:	204
static state Co:	216
Fatigue load limit Pu:	25.5



Rated rotation speed is
r/min

Refer to the speed:	-
limit speed:	2400
Mass bearing + tightening sleeve:	1.9

model

bearing:	*C2213K
	V
tapered adapter-sleeve:	H313

Dimensions are
mm

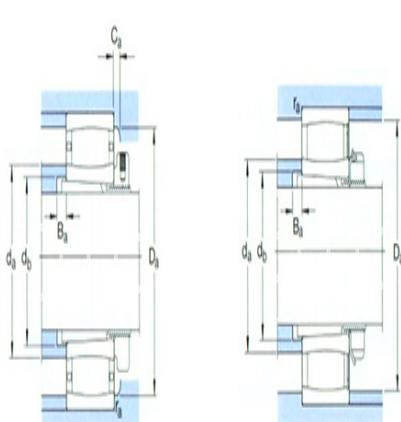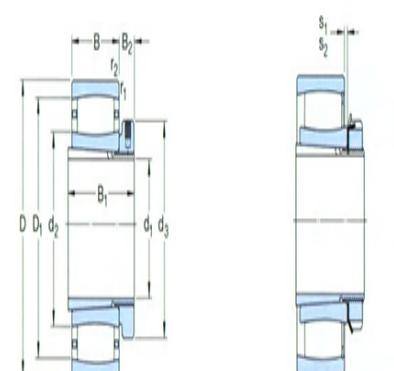

d ₁ :	60
d ₂ ~ :	79
d ₃ :	85
D1 ~ :	106
B1:	50
B2:	14
r _{1,2} the min:	1.5
s ₁ ¹⁾ ~ :	9.6
s ₂ ¹⁾ ~ :	5.3

Shoulder gear and chamfer size
mm

d _a the max:	97
d _b the min:	70

Da the min:	-
Da the max:	111
B _a the min:	8
Ca ²⁾ the min:	-
r _a the max:	1.5

Calculation coefficient

k ₁ :	0.097
k ₂ :	0.127