



Model: C2216KV

Basic size of
mm

d ₁ :	70
D:	140
B:	33

The basic rated load is
kN

trends C:	255
static state Co:	305
Fatigue load limit Pu:	34.5



Rated rotation speed is
r/min

Refer to the speed:	-
limit speed:	2000
Mass bearing + tightening sleeve:	3

model

bearing:	*C2216K V
tapered adapter-sleeve:	H316

Dimensions are
mm

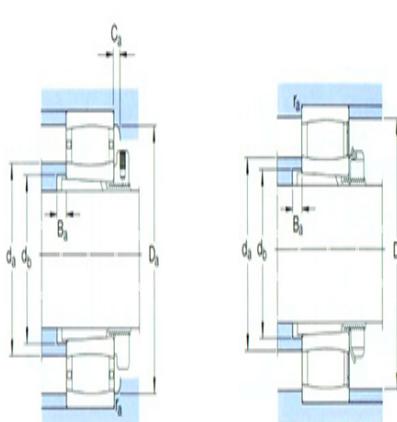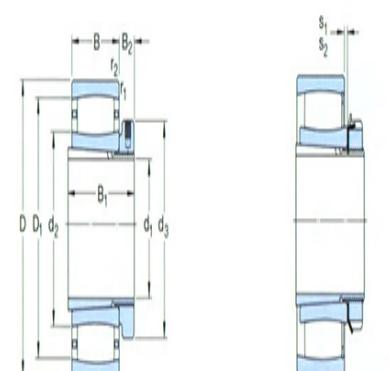

d ₁ :	70
d ₂ ~ :	98.1
d ₃ :	105
D1 ~ :	125
B1:	59
B2:	17
r _{1,2} the min:	2
s ₁ ¹⁾ ~ :	9.1
s ₂ ¹⁾ ~ :	4.8

Shoulder gear and chamfer size
mm

d _a the max:	115
d _b the min:	85

Da the min:	-
Da the max:	129
B _a the min:	12
Ca ²⁾ the min:	-
r _a the max:	2

Calculation coefficient

k ₁ :	0.104
k ₂ :	0.121