



Model: H308

Basic size of
mm

d_1 :	35
D:	80
B:	23

The basic rated load is
kN

trends C:	102
static state C_0 :	104
Fatigue load limit P_u :	12

Rated rotation speed is
r/min

Refer to the speed:	-
limit speed:	4500
Mass bearing + tightening sleeve:	0.7

model



bearing:	*C2208K V
tapered adapter-sleeve:	H308

Dimensions are
mm

d_1 :	35
$d_2 \sim$:	52.4
d_3 :	58
D1 ~:	69.9
B_1 :	36
B_2 :	10
$r_{1,2}$ the min:	1.1
$s_1^{1) \sim}$:	7.1
$s_2^{1) \sim}$:	4.1

Shoulder gear and chamfer size
mm

d_a the max:	66
d_b the min:	44

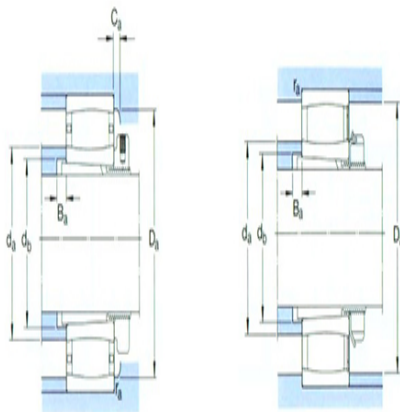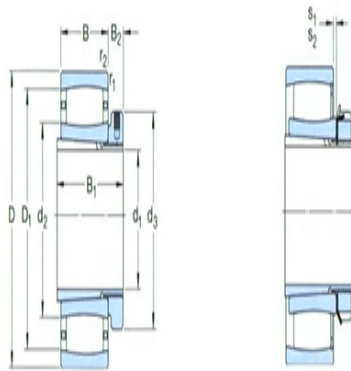

Da the min:	-
Da the max:	73
B _a the min:	5
Ca ²) the min:	-
r _a the max:	1

Calculation coefficient

k ₁ :	0.093
k ₂ :	0.128