



Model: H309E

Basic size of
mm

d ₁ :	40
D :	85
B :	23

The basic rated load is
kN

trends C :	93
static state Co :	93
Fatigue load limit Pu :	10.8

Rated rotation speed is
r/min

Refer to the speed :	8000
limit speed :	11000
Mass bearing + tightening sleeve :	0.76

model


bearing :	*C2209KTN 9
tapered adapter- sleeve :	H309E

Dimensions are
mm

d ₁ :	40
d ₂ ~ :	55.6
d ₃ :	65
D1 ~ :	73.1
B ₁ :	39
B ₂ :	13
r _{1,2} the min :	1.1
s ₁ ¹⁾ ~ :	7.1
s ₂ ¹⁾ ~ :	-

Shoulder gear and chamfer size
mm

d _a the max :	55
--------------------------	----

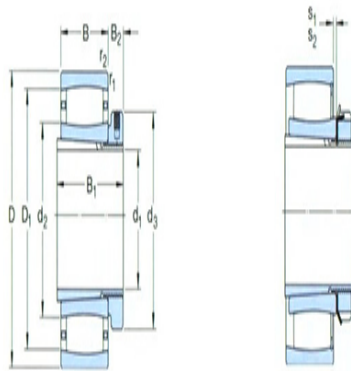

d_b the min:	50
Da the min:	71
Da the max:	78
B_a the min:	7
Ca^2) the min:	0.3
r_a the max:	1

Calculation coefficient

k_1 :	0.095
k_2 :	0.128