



Model: H313

Basic size of
mm

d ₁ :	60
D :	120
B :	31

The basic rated load is
kN

trends C :	204
static state Co :	216
Fatigue load limit Pu :	25.5

Rated rotation speed is
r/min

Refer to the speed :	-
limit speed :	2400
Mass bearing + tightening sleeve :	1.9

model



bearing :	*C2213K V
tapered adapter-sleeve :	H313

Dimensions are
mm

d ₁ :	60
d ₂ ~ :	79
d ₃ :	85
D1 ~ :	106
B ₁ :	50
B ₂ :	14
r _{1,2} the min :	1.5
s ₁ ¹⁾ ~ :	9.6
s ₂ ¹⁾ ~ :	5.3

Shoulder gear and chamfer size
mm

d _a the max :	97
d _b the min :	70

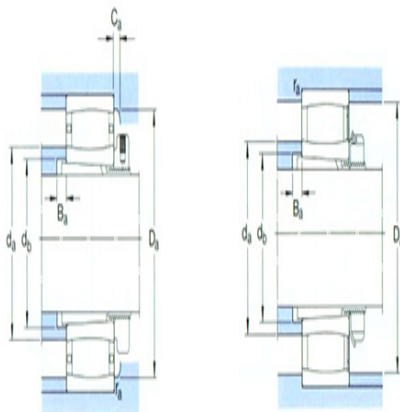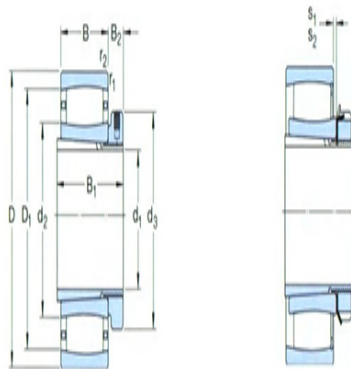

Da the min:	-
Da the max:	111
B _a the min:	8
Ca ²) the min:	-
r _a the max:	1.5

Calculation coefficient

k ₁ :	0.097
k ₂ :	0.127