



## Model: H315

Basic size of  
mm

$d_1$ :	65
D :	130
B :	31

The basic rated load is  
kN

trends C :	220
static state $C_0$ :	240
Fatigue load limit $P_u$ :	29

Rated rotation speed is  
r/min

Refer to the speed :	-
limit speed :	2200
Mass bearing + tightening sleeve :	2.4

model


bearing :	*C2215K V
tapered adapter-sleeve :	H315

Dimensions are  
mm

$d_1$ :	65
$d_2 \sim$ :	88.5
$d_3$ :	98
D1 $\sim$ :	115
$B_1$ :	55
$B_2$ :	15
$r_{1,2}$ the min :	1.5
$s_1^{1) \sim}$ :	9.6
$s_2^{1) \sim}$ :	5.3

Shoulder gear and chamfer size  
mm

$d_a$ the max :	105
$d_b$ the min :	80

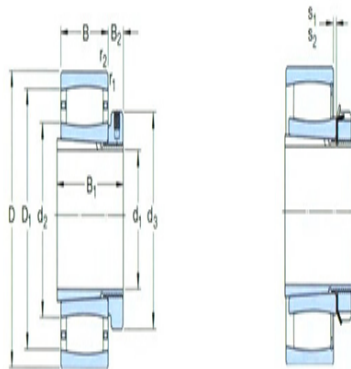

Da the min:	-
Da the max:	121
B <sub>a</sub> the min:	12
Ca <sup>2</sup> ) the min:	-
r <sub>a</sub> the max:	1.5

Calculation coefficient

k <sub>1</sub> :	0.099
k <sub>2</sub> :	0.127