



Model: H316

Basic size of
mm

d_1 :	70
D:	140
B:	33

The basic rated load is
kN

trends C:	255
static state C_0 :	305
Fatigue load limit P_u :	34.5

Rated rotation speed is
r/min

Refer to the speed:	-
limit speed:	2000
Mass bearing + tightening sleeve:	3

model



bearing:	*C2216K V
tapered adapter-sleeve:	H316

Dimensions are
mm

d_1 :	70
$d_2 \sim$:	98.1
d_3 :	105
D1 ~:	125
B_1 :	59
B_2 :	17
$r_{1,2}$ the min:	2
$s_1^{1) \sim}$:	9.1
$s_2^{1) \sim}$:	4.8

Shoulder gear and chamfer size
mm

d_a the max:	115
d_b the min:	85

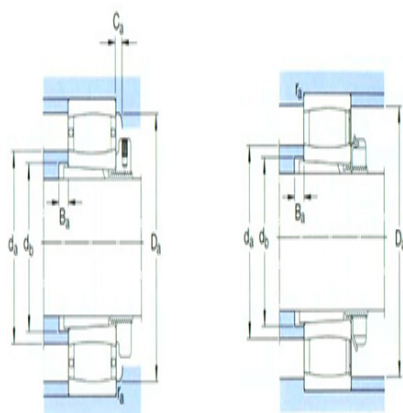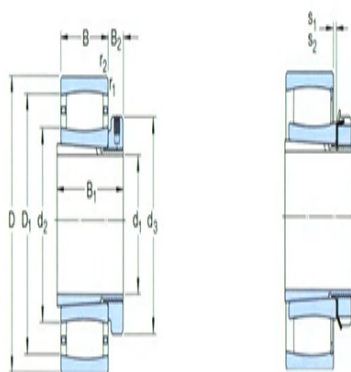

Da the min:	-
Da the max:	129
B _a the min:	12
Ca ²⁾ the min:	-
r _a the max:	2

Calculation coefficient

k ₁ :	0.104
k ₂ :	0.121