



Model: H2316

Basic size of
mm

d ₁ :	70
D :	170
B :	58

The basic rated load is
kN

trends C :	510
static state Co :	550
Fatigue load limit Pu :	61

Rated rotation speed is
r/min

Refer to the speed :	3400
limit speed :	4500
Mass bearing + tightening sleeve :	7.4

model


bearing :	*C2316 K
tapered adapter-sleeve :	H2316

Dimensions are
mm

d ₁ :	70
d ₂ ~ :	102
d ₃ :	105
D1 ~ :	145
B ₁ :	78
B ₂ :	17
r _{1,2} the min :	2.1
s ₁ ¹⁾ ~ :	10.1
s ₂ ¹⁾ ~ :	-

Shoulder gear and chamfer size
mm

d _a the max :	115
d _b the min :	88

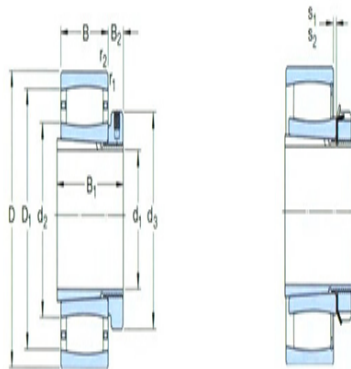

Da the min:	135
Da the max:	158
B _a the min:	6
Ca ²) the min:	2.4
r _a the max:	2

Calculation coefficient

k ₁ :	0.107
k ₂ :	0.101