



Model: C3026K1

Basic size of
 mm

d ₁ :	115
D:	200
B:	52

The basic rated load is
 kN

trends C:	390
static state Co:	585
Fatigue load limit Pu:	58.5

Rated rotation speed is
 r/min

Refer to the speed:	2800
limit speed:	3800
Mass bearing + tightening sleeve:	8.7

model



bearing:	*C3026K1)
tapered adapter- sleeve:	H3026

Dimensions are
 mm

d ₁ :	115
d ₂ ~ :	154
d ₃ :	155
D1 ~ :	180
B ₁ :	80
B ₂ :	23
r _{1,2} the min:	2
s ₁ ¹⁾ ~ :	16.5
s ₂ ¹⁾ ~ :	-

Shoulder gear and chamfer size
 mm

d _a the max:	152
-------------------------	-----

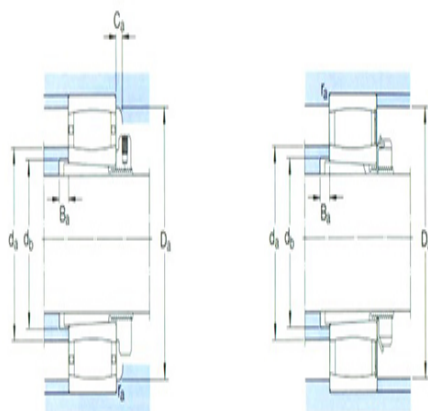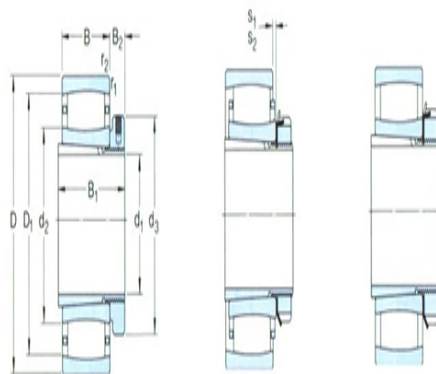

d_b the min:	137
Da the min:	182
Da the max:	190
B_a the min:	8
$Ca^{2)}$ the min:	4.4
r_a the max:	2

Calculation coefficient

k_1 :	0.123
k_2 :	0.1